


Double fork positioner for 1-2 pallets

DPK-C

The double fork positioner **DPK-C** can pick up one or two pallets through hydraulic fork positioning. The distance between the pallets can be reduced to zero. The strong frame construction maximises service life and safe working. The compact design gives excellent visibility.

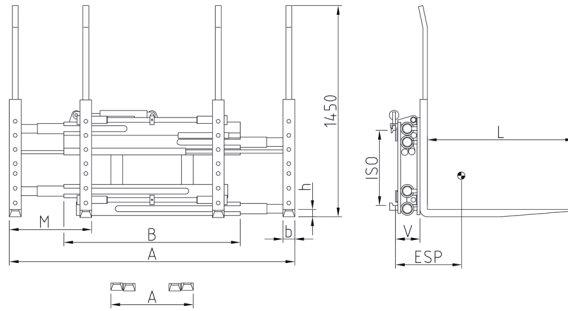

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	M mm	forks b x h x L mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
DPK 16-C	1600/600	1,5-1,8/600	II	1050	560-1790	560	80x40x1200	+/- 100	165	240	475
DPK 22-C	2200/600	2,0-2,5/500	II	1200	560-1940	560	80x40x1200	+/- 100	165	260	495
DPK 22-C2	2200/600	2,0-2,5/500	II	1200	660-2140	660	80x40x1200	+/- 100	165	248	515
DPK 25-C	2500/600	2,5/600	II	1200	560-1940	560	80x50x1200	+/- 100	165	260	535
DPK 25-C2	2500/600	2,5/600	II	1200	660-2140	660	80x50x1200	+/- 100	165	248	555
DPK 25-C3	2500/600	2,5/600	II	1300	560-2040	560	80x50x1200	+/- 100	165	260	602
DPK 30-C	2600/600	3,0/500	III	1200	560-1940	560	80x50x1200	+/- 100	165	250	540
DPK 30-C2	2600/600	3,0/500	III	1200	660-2140	660	80x50x1200	+/- 100	165	250	565
DPK 30-C3	2600/600	3,0/500	III	1300	560-2040	560	80x50x1200	+/- 100	165	225	595
DPK 32-C	2800/600	3,5/500	III	1200	560-1940	560	80x50x1200	+/- 100	185	235	585
DPK 32-C2	2800/600	3,5/500	III	1300	660-2140	660	80x50x1200	+/- 100	185	235	620
DPK 32-C3	2800/600	3,5/500	III	1300	560-2040	560	80x50x1200	+/- 100	185	235	640
DPK 35-C	3200/600	3,0/600-4,0/500	III	1200	560-1940	560	80x60x1200	+/- 100	185	230	635
DPK 35-C2	3200/600	3,0/600-4,0/500	III	1300	660-2140	660	80x60x1200	+/- 100	185	230	670
DPK 35-C3	3200/600	3,0/600-4,0/500	III	1300	560-2040	560	80x60x1200	+/- 100	185	230	690
DPK 40-C	4500/600	4,0-5,0/600	III	1400	560-1940	560	80x60x1200	+/- 150	195	215	750
DPK 40-C2	4500/600	4,0-5,0/600	III	1400	660-2140	660	80x60x1200	+/- 150	195	210	780
DPK 40-C3	4500/600	4,0-5,0/600	III	1400	560-2040	560	80x60x1200	+/- 150	195	215	750
DPK 50-C	5500/600	5,0-6,0/600	IV	1400	560-1940	560	80x60x1200	+/- 150	212	200	1010

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard

- no sideshift reduce price by ISO II and III, ISO IV, data change please ask
- optional with high visibility load backrest
ISO II, III upon request / ISO IV not available



automatic lubrication system:

DPK 16 - 30 C upon request

(sideshift top and bottom)

DPK 32 - 100 C (sideshift top) upon request

- single pair control upon request
- scanner holder upon request



DURWEN
Forklift Attachments

More than 75 years experience