

360° rotator

adjustable and foldable sidearm

DG-ST-K
DG-S-ST-K

The rotator **DG-ST-K** has a manually foldable sidearm that provides side support to containers during the emptying process. The foldable sidearm can be adjusted for boxes from 1200 to 2250 mm box width. The arm can be manually removed and inserted on the other side of the unit. The boxes (containers) should have closed pockets for the forks in order to avoid losing them when rotating. The unit does not clamp the container. If you need to clamp the container for safer handling, please see our type DGE box discharger or rotator type DG-BK.






image shows type DG-ST-K



without sideshift												
type	capacity kg LC mm	lift truck to LC mm	ISO	width B mm	arm h x t x L mm	max. torque ΔP 130 bar Nm	overall height* mm	supported box width mm	T mm	V LLC mm	ESP COG mm	weight kg
DG 20-ST-K	2000/500	1,0-2,0/500	II	1150	140x70x1200	5200	970	1200-2250	117	190	83/122	374
DG 25-ST-K	2500/600	2,5/600	II			9400	970		120	198	80/112	410
DG 30-ST-K	3000/500	3,0/500	III			9400	1010		130	198	83/114	455
DG 35-ST-K	3500/500	3,0/600- 3,5/500	III			11700	1010		135	203	87/118	465

- 1 hydraulic function required
- includes hoses and couplings
- safety valve as standard

- quick release hooks: (ISO II), (ISO III) upon request
- forks not included
- hook-on forks reinforced for rotator use must be used

*with ISO 2328 A forks

with constant sideshift													
type	capacity kg LC mm	lift truck to LC mm	ISO	width B mm	arm h x t x L mm	max. torque ΔP 100 bar Nm	overall height* mm	supported box width mm	sideshift mm	T mm	V LLC mm	ESP COG mm	weight kg
DG 20-S-ST-K	2000/500	1,0-2,0/500	II	1150	140x70x1200	5200	970	1200-2250	+/- 100	166	239	119/154	424
DG 25-S-ST-K	2500/600	2,5/600	II			9400	970		+/- 100	149	229	102/133	455
DG 30-S-ST-K	3000/500	3,0/500	III			9400	1010		+/- 100	175	243	115/142	520
DG 35-S-ST-K	3500/500	3,0/600- 3,5/500	III			11700	1010		+/- 100	180	248	118/145	530

- 2 hydraulic functions required
- includes hoses and couplings
- safety valve as standard
- constant sideshift as standard

- quick release hooks: (ISO II), (ISO III) upon request
- forks not included
- hook-on forks reinforced for rotator use must be used

*with ISO 2328 A forks

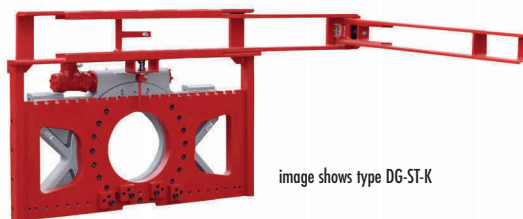


image shows type DG-ST-K

DURWEN
Forklift Attachments

More than 75 years experience