


# 360° rotator

**DG**

The **rotator DG** has a cast steel frame enabling compact design. The worm gear has several teeth meshing at one time thus helping to increase the service life of the attachment. A seal fitted as standard protects the rotator against the ingress of dirt and dust.

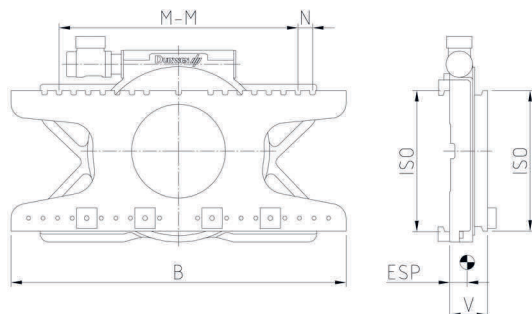


| type   | capacity<br>kg<br>LC mm | lift truck<br>to<br>LC mm | ISO | width<br>B<br>mm | centre distance<br>M-M<br>mm | N<br>mm | max. torque<br>$\Delta P$<br>130 bar Nm | V<br>LLC<br>mm | ESP<br>COG<br>mm | weight<br>kg |
|--------|-------------------------|---------------------------|-----|------------------|------------------------------|---------|-----------------------------------------|----------------|------------------|--------------|
| DG 16  | 1600/500                | 1,5-1,8/500               | II  | 880              | 260-660                      | 50      | 5200                                    | 117            | 51               | 217          |
| DG 20  | 2000/500                | 2,0/500                   | II  | 980              | 260-760                      | 50      | 5200                                    | 117            | 52               | 223          |
| DG 25  | 2500/600                | 2,5/600                   | II  | 1080             | 260-860                      | 50      | 9400                                    | 120            | 53               | 269          |
| DG 30  | 3000/500                | 3,0/500                   | III | 1150             | 320-920                      | 50      | 9400                                    | 130            | 61               | 316          |
| DG 35  | 3500/500                | 3,0/600- 3,5/500          | III | 1150             | 320-920                      | 50      | 11700                                   | 135            | 65               | 331          |
| DG 40  | 4000/500                | 3,5/600-4,0/500           | III | 1150             | 310-810                      | 50      | 14000                                   | 148            | 66               | 455          |
| DG 45  | 5000/600                | 4,0-5,0/600               | III | 1350             | 310-1110                     | 50      | 14000                                   | 148            | 69               | 471          |
| DG 50  | 5000/600                | 5,0/600                   | IV  | 1380             | 310-1110                     | 50      | 14000                                   | 153            | 76               | 545          |
| DG 60  | 6000/600                | 6,0/600                   | IV  | 1500             | 310-1210                     | 50      | 22000                                   | 155            | 73               | 706          |
| DG 80  | 8000/600                | 7,0-8,0/600               | IV  | 1750             | 380-1480                     | 50      | 22000                                   | 165            | 80               | 763          |
| DG 100 | 8000/900                | 8,0/900                   | IV  | 1750             | 380-1480                     | 50      | 26000                                   | 178            | 84               | 860          |
| DG 120 | 12000/600               | 8,0/1100-<br>12,0/600     | IV  | 1850             | 380-1580                     | 50      | 26000                                   | 178            | 87               | 920          |
| DG 160 | 16000/600               | 14,0/600-<br>16,0/600     | Pin | 2400             | bolt-on                      | 100     | 52000                                   | 266            | 140              | 3700         |
| DG 200 | 20000/600               | 18,0/600-<br>20,0/600     | Pin | 2400             | bolt-on                      | 100     | 52000                                   | 271            | 143              | 3795         |
| DG 240 | 24000/600<br>16000/900  | 16,0/1200                 | Pin | 2400             | bolt-on                      | 100     | 52000                                   | 276            | 148              | 3860         |

- 1 hydraulic function required
- includes hoses and couplings

- safety valve as standard
- quick release hooks: (ISO II), (ISO III), (ISO IV) upon request

- forks not included
- hook-on forks reinforced for rotator use must be used
- options see page 216

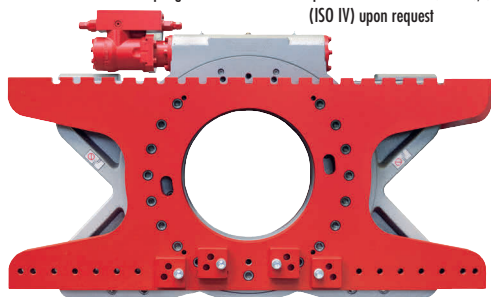

**DURWEN**   
Forklift Attachments

More than 75 years experience