


Clamp with turnable forks

DGK

integral sideshift, bolt-on forks


The clamp with turnable forks DGK allows for flexible use of forklift trucks. The fork on this attachment can be converted manually from pallet to clamp position. Loads standing close together can be clamped easily. Pallets can also be handled simply with forks in the normal position. The attachment is not recommended for heavy duty clamp jobs and clamping with forks in the pallet position is not allowed.

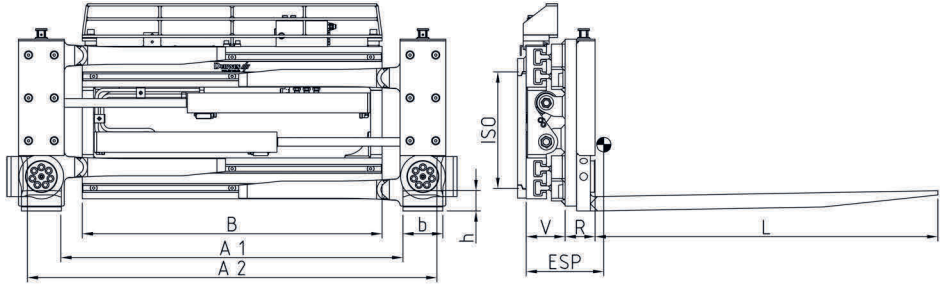

type	capacity on forks kg LC mm	capacity as clamp kg LC mm	lift truck to LC mm	ISO	B mm	opening range A1 ITI mm	opening range A2 ITI mm	forks b x h x L mm	R mm	V LLC mm	ESP COG mm	weight kg
DGK 20	2000/500	1200/500	1,5- 2,0/500	II	1050 1150	130-1210 315-1675	405-1485 590-1950	125x45x1200	105	136	260 258	490 505
DGK 25	2500/600	1750/500	2,0-2,5/600	II	1050 1150	115-1195 300-1660	395-1475 580-1940	140x50x1200			263 260	505 520
DGK 30	3000/500	2000/500	3,0/500	III	1050 1150 1350	115-1195 300-1660 300-1860	395-1475 580-1940 580-2140	140x50x1200			258 255 250	525 540 570

- 2 hydraulic functions required (1 without sideshift)
- includes hoses and couplings
- integral sideshift as standard
- with protection strip as standard (height 150 mm above top edge of unit)
- load backrest type LS-K see page 217
- forks can be manually set to 0°/45°/90°, clamping only in 90° position
- mounting ISO A as standard, ISO B upon request
- max. fork length 1600 mm

- hydraulic fork turn upon request, one more hydraulic function required, data change, please ask
- pressure gauge with hand wheel upon request
- manual 3 stage pressure relief valve upon request
- if you do not want sideshift notify us on your order

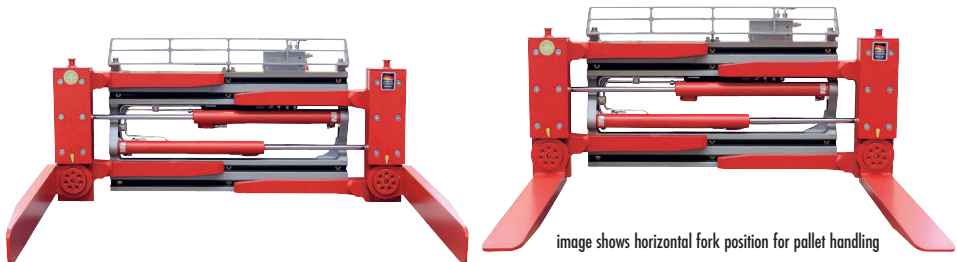

forks vertical for clamping (90° position)

image shows horizontal fork position for pallet handling

DURWEN
Forklift Attachments

More than 75 years experience