


Triple sideshift, 3 pallets

DST 1-0-1

Centre fork carriage fixed, the outer fork carriages hydraulically driven. One main sideshift.

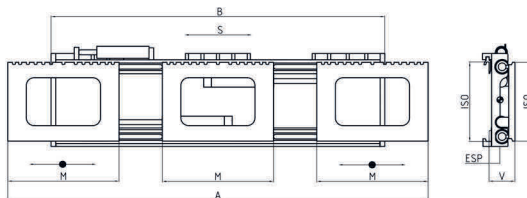


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	M mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
DST 50-1-0-1	5000/600	5,0/600	III	2160 2940	2160-2720 2940-3500	720 980	+/- 100	168	90	530 655
DST 80-1-0-1	8000/600	8,0/600	IV	2160 2940	2160-2720 2940-3500	720 980	+/- 160	182		860 970

- 2 hydraulic functions required
- includes hoses and couplings
- choose solenoid valve for individual carriage movement instead.
One extra electric function required
- choose flow divider for synchronised movement of outer carriages
- bolt-on forks upon request


Triple sideshift, 2 pallets

DST 1-1

Both fork carriages hydraulically driven. One main sideshift.

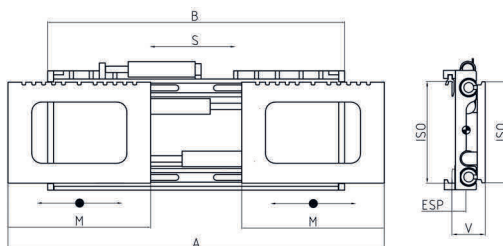

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	M mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
DST 25-1-1	2500/600	2,5/600	II	1500 1980	1500-1900 1980-2380	720 980	+/- 100	155	81 84	285 325
DST 50-1-1	5000/600	5,0/600	III	1500 2120	1500-1900 1980-2540	720 980	+/- 100	168	85 93	375 480
DST 80-1-1	8000/600	8,0/600	IV	1500 2120	1500-1900 1980-2540	720 980	+/- 160	182	85 85	690 815

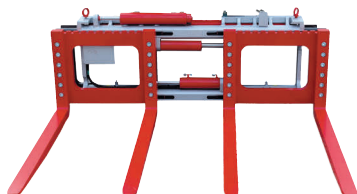

- 2 hydraulic functions required
- includes hoses and couplings
- choose solenoid valve for individual carriage movement instead. One extra electric function required
- choose flow divider for synchronised movement of outer carriages
- bolt-on forks upon request

DURWEN
Forklift Attachments

More than 75 years experience

image shows type DST 50-1-1 with special equipment: bolt-on forks