
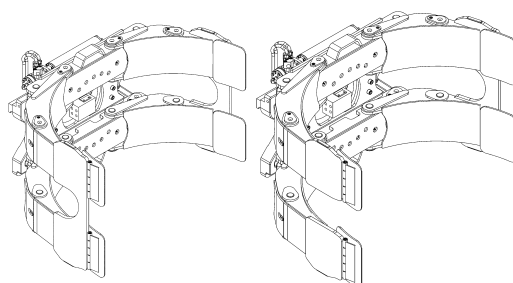


Paper roll clamp 360°

PRK 100
ISO IV

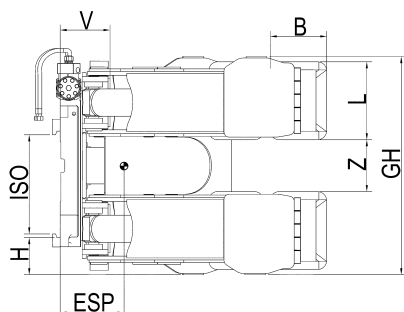

long arm unsplit

long arm split

type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
long arm unsplit											
PRK 100 B - 13	5600/650	IV	400 - 1300	powered	1240	280x500	200	250	255	246	1630
PRK 100 B - 14	5500/725		450 - 1450							263	1640
PRK 100 B - 15	5300/760		480 - 1520							280	1660
PRK 100 B - 16	5000/800		550 - 1600							297	1680
PRK 100 B - 18	4600/915		580 - 1830							311	1710
PRK 100 B - 19	4300/950		600 - 1900							328	1730
PRK 100 B - 20	4000/1000		600 - 2000							345	1750
PRK 100 B - 21	3800/1050		650 - 2100							362	1780
long arm split											
PRK 100 TB - 13	5600/650	IV	400 - 1300	powered	1240	280x500	200	250	255	241	1620
PRK 100 TB - 14	5500/725		450 - 1450							258	1640
PRK 100 TB - 15	5300/760		480 - 1520							275	1650
PRK 100 TB - 16	5000/800		550 - 1600							292	1670
PRK 100 TB - 18	4600/915		580 - 1830							306	1700
PRK 100 TB - 19	4300/950		600 - 1900							223	1720
PRK 100 TB - 20	4000/1000		600 - 2000							340	1740
PRK 100 TB - 21	3800/1050		650 - 2100							357	1770

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces upon request:
smooth rubber black
rhombic rubber black or white
smooth polyurethane orange
hot steel sprayed
- other surfaces upon request

- centre cover upon request
- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard, positioning at 45°, chose on order (no add-on price)
- 0° arm design upon request

- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks (ISO II) upon request
- force options see page 219