




Paper roll clamp 360°

**PRK 20
ISO II**

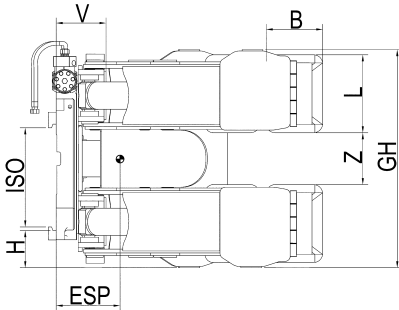

long arm unsplit



long arm split


type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
long arm unsplit											
PRK 20 B - 11	1500/575	II	250 - 1150	powered	840	220x300	200	175	179	205	510
PRK 20 S - 11	1500/575		400 - 1150	fixed						205	460
PRK 20 B - 13	1300/650		250 - 1300	powered						225	525
PRK 20 S - 13	1300/650		400 - 1300	fixed						225	475
PRK 20 B - 14	1200/700		250 - 1400	powered						245	535
PRK 20 S - 14	1200/700		600 - 1400	fixed						245	485
PRK 20 B - 15	1100/760		250 - 1520	powered						257	560
PRK 20 S - 15	1100/760		600 - 1520	fixed						257	525
PRK 20 B - 16	1000/800		250 - 1600	powered						267	598
PRK 20 S - 16	1000/800	600 - 1600	fixed	267	545						
long arm split											
PRK 20 TB - 11	1500/575	II	250 - 1150	powered	840	220x300	200	175	179	205	505
PRK 20 TS - 11	1500/575		400 - 1150	fixed						205	455
PRK 20 TB - 13	1300/650		250 - 1300	powered						225	520
PRK 20 TS - 13	1300/650		400 - 1300	fixed						225	470
PRK 20 TB - 14	1200/700		250 - 1400	powered						240	530
PRK 20 TS - 14	1200/700		600 - 1400	fixed						240	480
PRK 20 TB - 15	1100/760		250 - 1520	powered						253	555
PRK 20 TS - 15	1100/760		600 - 1520	fixed						253	517
PRK 20 TB - 16	1000/800		250 - 1600	powered						262	565
PRK 20 TS - 16	1000/800		600 - 1600	fixed						262	540

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces upon request:
smooth rubber black
rhombic rubber black or white
smooth polyurethane orange
hot steel sprayed
- other surfaces upon request

- centre cover upon request
- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard, positioning at 45°, chose on order (no add-on price)
- 0° arm design upon request

- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks (ISO II) upon request
- force options see page 219

image shows unit complete with
optional centre cover



DURWEN 
Forklift Attachments

More than 75 years experience