




Paper roll clamp 360°

PRK 30
ISO II/III

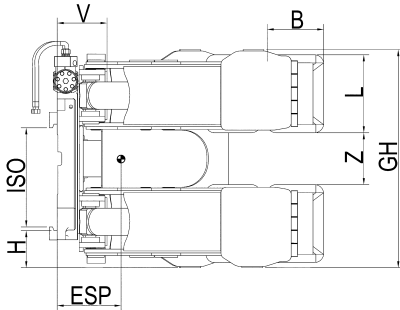

long arm unsplit



long arm split

type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
long arm unsplit											
PRK 30 B - 12	2400/600	II / III	250 - 1200	powered	840	220x300	200	143	197	222	660
PRK 30 S - 12	2400/600		500 - 1200	fixed						222	655
PRK 30 B - 13	2200/650		250 - 1300	powered						225	675
PRK 30 S - 13	2200/650		500 - 1300	fixed						225	670
PRK 30 B - 14	2000/725		250 - 1450	powered						235	685
PRK 30 S - 14	2000/725		600 - 1450	fixed						235	680
PRK 30 B - 15	1900/760		250 - 1520	powered						254	700
PRK 30 S - 15	1900/760		600 - 1520	fixed						254	695
PRK 30 B - 16	1750/800		250 - 1600	powered						275	715
PRK 30 S - 16	1750/800		600 - 1600	fixed						275	710
long arm split											
PRK 30 TB - 12	2400/600	II / III	250 - 1200	powered	840	220x300	200	143	197	215	650
PRK 30 TS - 12	2400/600		500 - 1200	fixed						215	645
PRK 30 TB - 13	2200/650		250 - 1300	powered						220	665
PRK 30 TS - 13	2200/650		500 - 1300	fixed						220	660
PRK 30 TB - 14	2000/725		250 - 1450	powered						228	675
PRK 30 TS - 14	2000/725		600 - 1450	fixed						228	670
PRK 30 TB - 15	1900/760		250 - 1520	powered						248	690
PRK 30 TS - 15	1900/760		600 - 1520	fixed						248	685
PRK 30 TB - 16	1750/800		250 - 1600	powered						270	705
PRK 30 TS - 16	1750/800		600 - 1600	fixed						270	700

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces upon request:
smooth rubber black
rhombic rubber black or white
smooth polyurethane orange
hot steel sprayed
- other surfaces upon request

- centre cover upon request
- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard, positioning at 45°, chose on order (no add-on price)
- 0° arm design upon request

- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks (ISO II) upon request
- force options see page 219

image shows unit complete with
optional centre cover



DURWEN 
Forklift Attachments

More than 75 years experience