




Paper roll clamp 360°

PRK 35
ISO II/III

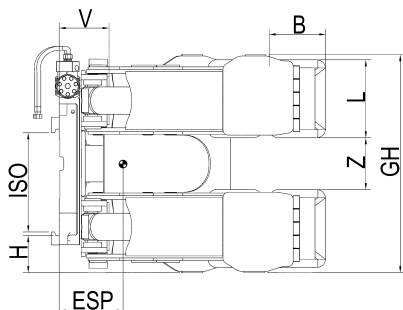

long arm unsplit



long arm split


type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
long arm unsplit											
PRK 35 B - 13	2500/650	II/III	250 - 1300	powered	840	220x300	200	143	197	235	735
PRK 35 S - 13	2500/650		500 - 1300	fixed						235	730
PRK 35 B - 14	2200/725		250 - 1450	powered						248	760
PRK 35 S - 14	2200/725		500 - 1450	fixed						248	755
PRK 35 B - 15	2100/760		250 - 1520	powered						260	790
PRK 35 S - 15	2100/760		500 - 1520	fixed						260	785
PRK 35 B - 16	2000/800		250 - 1600	powered						275	815
PRK 35 S - 16	2000/800		600 - 1600	fixed						275	810
PRK 35 B - 18	1700/915		350 - 1830	powered						301	850
PRK 35 S - 18	1700/915		630 - 1830	fixed						301	845
long arm split											
PRK 35 TB - 13	2500/650	II/III	250 - 1300	powered	840	220x300	200	143	197	230	725
PRK 35 TS - 13	2500/650		500 - 1300	fixed						230	725
PRK 35 TB - 14	2200/725		250 - 1450	powered						243	750
PRK 35 TS - 14	2200/725		500 - 1450	fixed						243	745
PRK 35 TB - 15	2100/760		250 - 1520	powered						245	780
PRK 35 TS - 15	2100/760		500 - 1520	fixed						245	775
PRK 35 TB - 16	2000/800		250 - 1600	powered						270	805
PRK 35 TS - 16	2000/800		600 - 1600	fixed						270	800
PRK 35 TB - 18	1700/915		350 - 1830	powered						296	840
PRK 35 TS - 18	1700/915		630 - 1830	fixed						296	835

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces upon request:
smooth rubber black
rhombic rubber black or white
smooth polyurethane orange
hot steel sprayed
- other surfaces upon request

- centre cover upon request
- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard, positioning at 45°, chose on order (no add-on price)
- 0° arm design upon request

- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks (ISO II) upon request
- force options see page 219

image shows unit complete with
optional centre cover



DURWEN
Forklift Attachments

More than 75 years experience