
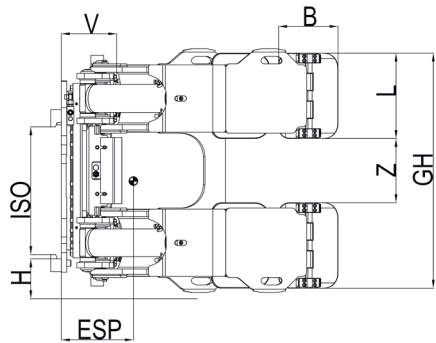


Paper roll clamp 180°

PRK 40-180
ISO III

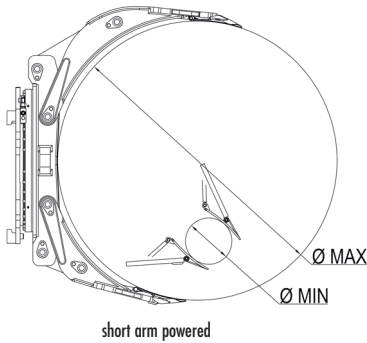

type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
PRK 40 - long arm unsplit											
PRK 40 B-13-180	3000/650	III	250 - 1300	powered	1040	250x400	200	184	215	261	835
PRK 40 S-13-180	3000/650		500 - 1300	fixed						261	830
PRK 40 B-15-180	2650/760		250 - 1520	powered						285	890
PRK 40 S-15-180	2650/760		500 - 1520	fixed						285	885
PRK 40 B-16-180	2500/800		250 - 1600	powered						311	915
PRK 40 S-16-180	2500/800		600 - 1600	fixed						311	910
PRK 40 - long arm split											
PRK 40 TB-13-180	3000/650	III	250 - 1300	powered	1040	250x400	200	184	215	254	825
PRK 40 TS-13-180	3000/650		500 - 1300	fixed						254	820
PRK 40 TB-15-180	2650/760		250 - 1520	powered						280	880
PRK 40 TS-15-180	2650/760		500 - 1520	fixed						280	875
PRK 40 TB-16-180	2500/800		250 - 1600	powered						307	905
PRK 40 TS-16-180	2500/800		600 - 1600	fixed						307	900

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces upon request:
smooth rubber black
rhombic rubber black or white
smooth polyurethane orange
hot steel sprayed
- other surfaces upon request
- centre cover upon request

- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard
- 0° arm design upon request
- one piece contact plate per arm upon request

- load extender upon request
- quick release hooks (ISO III) upon request
- force options see page 219