




Paper roll clamp 360°

PRK 40
ISO III/IV

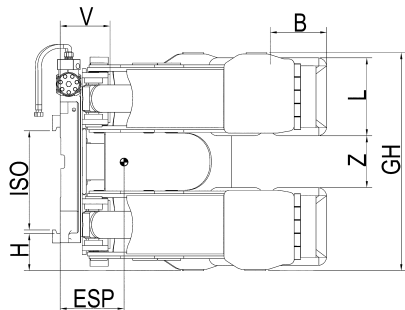

long arm unsplit



long arm split


type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
long arm unsplit											
PRK 40 B - 13	3000/650	III/IV	250 - 1300	powered	1040	250x400	200	195/200	215	230	905
PRK 40 S - 13	3000/650		500 - 1300	fixed						230	900
PRK 40 B - 14	2800/725		250 - 1450	powered						250	940
PRK 40 S - 14	2800/725		500 - 1450	fixed						250	935
PRK 40 B - 15	2650/760		250 - 1520	powered						272	985
PRK 40 S - 15	2650/760		500 - 1520	fixed						272	980
PRK 40 B - 16	2500/800		250 - 1600	powered						290	1010
PRK 40 S - 16	2500/800		600 - 1600	fixed						290	1005
PRK 40 B - 18	2100/915		350 - 1830	powered						325	1050
PRK 40 S - 18	2100/915		630 - 1830	fixed						325	1045
long arm split											
PRK 40 TB - 13	3000/650	III/IV	250 - 1300	powered	1040	250x400	200	195/200	215	225	895
PRK 40 TS - 13	3000/650		500 - 1300	fixed						225	890
PRK 40 TB - 14	2800/725		250 - 1450	powered						245	930
PRK 40 TS - 14	2800/725		500 - 1450	fixed						245	925
PRK 40 TB - 15	2650/760		250 - 1520	powered						265	975
PRK 40 TS - 15	2650/760		500 - 1520	fixed						265	970
PRK 40 TB - 16	2500/800		250 - 1600	powered						285	1000
PRK 40 TS - 16	2500/800		600 - 1600	fixed						285	995
PRK 40 TB - 18	2100/915		350 - 1830	powered						305	1040
PRK 40 TS - 18	2100/915		630 - 1830	fixed						305	1035

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces upon request:
smooth rubber black
rhombic rubber black or white
smooth polyurethane orange
hot steel sprayed
- other surfaces upon request

- centre cover upon request
- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard, positioning at 45°, chose on order (no add-on price)
- 0° arm design upon request

- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks (ISO II) upon request
- force options see page 219

image shows unit complete with
optional centre cover



DURWEN
Forklift Attachments

More than 75 years experience