
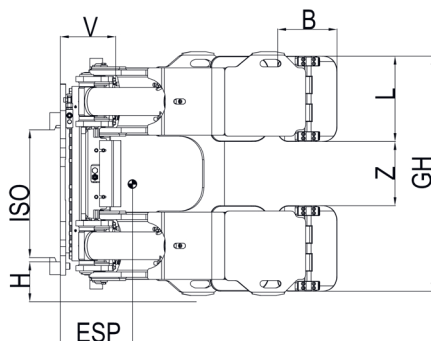


Paper roll clamp 180°

PRK 45-180
ISO III

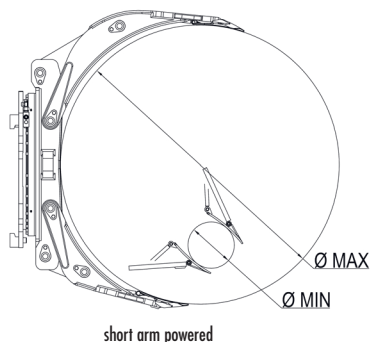

type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
PRK 45 - long arm unsplit											
PRK 45 B-13-180	3500/650	III	250 - 1300	powered	1040	250x400	200	184	215	264	865
PRK 45 S-13-180	3500/650		550 - 1300	fixed						264	860
PRK 45 B-15-180	3000/760		250 - 1520	powered						288	920
PRK 45 S-15-180	3000/760		650 - 1520	fixed						288	915
PRK 45 B-16-180	2800/800		250 - 1600	powered						315	945
PRK 45 S-16-180	2800/800		650 - 1600	fixed						315	940
PRK 45 - long arm split											
PRK 45 TB-13-180	3500/650	III	250 - 1300	powered	1040	250x400	200	184	215	259	855
PRK 45 TS-13-180	3500/650		550 - 1300	fixed						259	850
PRK 45 TB-15-180	3000/760		250 - 1520	powered						283	910
PRK 45 TS-15-180	3000/760		650 - 1520	fixed						283	905
PRK 45 TB-16-180	2800/800		250 - 1600	powered						310	935
PRK 45 TS-16-180	2800/800		650 - 1600	fixed						310	930

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces upon request:
smooth rubber black
rhombic rubber black or white
smooth polyurethane orange
hot steel sprayed
- other surfaces upon request
- centre cover upon request

- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard
- 0° arm design upon request
- one piece contact plate per arm upon request

- load extender upon request
- quick release hooks (ISO III) upon request
- force options see page 219