




Paper roll clamp 360°

PRK 45
ISO III/IV

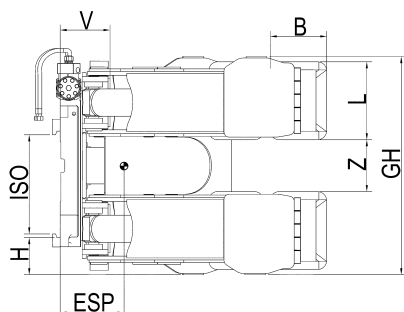

long arm unsplit



long arm split


type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
long arm unsplit											
PRK 45 B - 13	3500/650	III/IV	250 - 1300	powered	1040	250x400	200	195/200	220	245	945
PRK 45 S - 13	3500/650		550 - 1300	fixed						245	940
PRK 45 B - 14	3300/725		250 - 1450	powered						259	975
PRK 45 S - 14	3300/725		550 - 1450	fixed						259	970
PRK 45 B - 15	3000/760		250 - 1520	powered						276	1000
PRK 45 S - 15	3000/760		650 - 1520	fixed						276	995
PRK 45 B - 16	2800/800		250 - 1600	powered						310	1050
PRK 45 S - 16	2800/800		650 - 1600	fixed						310	1045
PRK 45 B - 18	2500/915		400 - 1830	powered						315	1070
PRK 45 S - 18	2500/915		650 - 1830	fixed						315	1065
long arm split											
PRK 45 TB - 13	3500/650	III/IV	250 - 1300	powered	1040	250x400	200	195/200	220	240	935
PRK 45 TS - 13	3500/650		550 - 1300	fixed						240	930
PRK 45 TB - 14	3300/725		250 - 1450	powered						254	965
PRK 45 TS - 14	3300/725		550 - 1450	fixed						254	960
PRK 45 TB - 15	3000/760		250 - 1520	powered						266	990
PRK 45 TS - 15	3000/760		650 - 1520	fixed						266	985
PRK 45 TB - 16	2800/800		250 - 1600	powered						300	1040
PRK 45 TS - 16	2800/800		650 - 1600	fixed						300	1035
PRK 45 TB - 18	2500/915		400 - 1830	powered						305	1060
PRK 45 TS - 18	2500/915		650 - 1830	fixed						305	1055

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces upon request:
smooth rubber black
rhombic rubber black or white
smooth polyurethane orange
hot steel sprayed
- other surfaces upon request

- centre cover upon request
- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard, positioning at 45°, chose on order (no add-on price)
- 0° arm design upon request

- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks (ISO II) upon request
- force options see page 219

image shows unit complete with
optional centre cover



DURWEN
Forklift Attachments

More than 75 years experience