
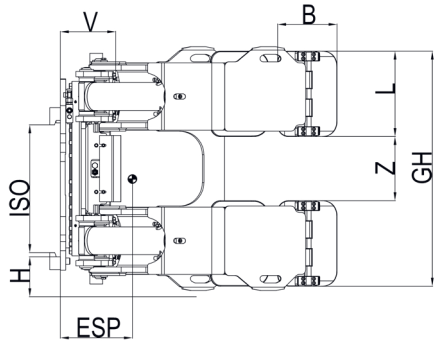


Paper roll clamp 180°

PRK 50-180
ISO III/IV

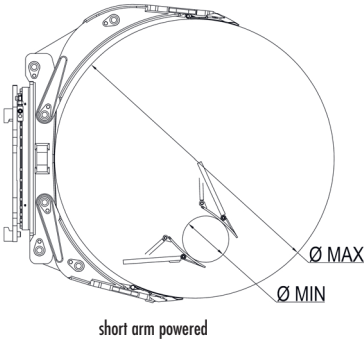

type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
PRK 50 - long arm unsplit											
PRK 50 B-13-180	4000/650	III/IV	250 - 1300	powered	1140	280x400	300	157/202	220	273	1015
PRK 50 S-13-180	4000/650		500 - 1300	fixed						273	1010
PRK 50 B-15-180	3800/760		250 - 1520	powered						296	1070
PRK 50 S-15-180	3800/760		500 - 1520	fixed						296	1065
PRK 50 B-16-180	3700/800		250 - 1600	powered						304	1090
PRK 50 S-16-180	3700/800		500 - 1600	fixed						304	1085
PRK 50 B-18-180	3400/915		350 - 1830	powered						322	1140
PRK 50 S-18-180	3400/915		630 - 1830	fixed						322	1135
PRK 50 - long arm split											
PRK 50 TB-13-180	4000/650	III/IV	250 - 1300	powered	1140	280x400	300	157/202	220	268	1005
PRK 50 TS-13-180	4000/650		500 - 1300	fixed						268	1000
PRK 50 TB-15-180	3800/760		250 - 1520	powered						291	1060
PRK 50 TS-15-180	3800/760		500 - 1520	fixed						291	1055
PRK 50 TB-16-180	3700/800		250 - 1600	powered						299	1080
PRK 50 TS-16-180	3700/800		500 - 1600	fixed						299	1075
PRK 50 TB-18-180	3400/915		350 - 1830	powered						317	1130
PRK 50 TS-18-180	3400/915		630 - 1830	fixed						317	1125

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces upon request:
 - smooth rubber black
 - rhombic rubber black or white
 - smooth polyurethane orange
 - hot steel sprayed
- other surfaces upon request
- centre cover upon request

- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard
- 0° arm design upon request
- one piece contact plate per arm upon request

- load extender upon request
- quick release hooks (ISO III), (ISO IV) upon request
- force options see page 219