
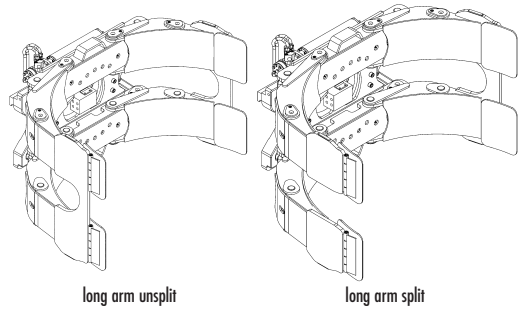


Paper roll clamp 360°

PRK 50
ISO III/IV

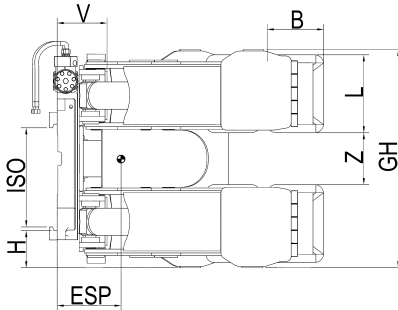


type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
long arm unsplit											
PRK 50 B - 13	4000/650	III/IV	250 - 1300	powered	1140	280x400	300	245/250	225	247	1060
PRK 50 S - 13	4000/650		500 - 1300	fixed						247	1055
PRK 50 B - 14	3900/725		250 - 1450	powered						259	1095
PRK 50 S - 14	3900/725		500 - 1450	fixed						259	1090
PRK 50 B - 15	3800/760		250 - 1520	powered						272	1130
PRK 50 S - 15	3800/760		500 - 1520	fixed						272	1125
PRK 50 B - 16	3700/800		250 - 1600	powered						283	1150
PRK 50 S - 16	3700/800		500 - 1600	fixed						283	1145
PRK 50 B - 18	3400/915		350 - 1830	powered						307	1220
PRK 50 S - 18	3400/915		630 - 1830	fixed						307	1215
long arm split											
PRK 50 TB - 13	4000/650	III/IV	250 - 1300	powered	1140	280x400	300	245/250	225	242	1050
PRK 50 TS - 13	4000/650		500 - 1300	fixed						242	1045
PRK 50 TB - 14	3900/725		250 - 1450	powered						254	1085
PRK 50 TS - 14	3900/725		500 - 1450	fixed						254	1080
PRK 50 TB - 15	3800/760		250 - 1520	powered						267	1120
PRK 50 TS - 15	3800/760		500 - 1520	fixed						267	1115
PRK 50 TB - 16	3700/800		250 - 1600	powered						278	1140
PRK 50 TS - 16	3700/800		500 - 1600	fixed						278	1135
PRK 50 TB - 18	3400/915		350 - 1830	powered						302	1210
PRK 50 TS - 18	3400/915		630 - 1830	fixed						302	1205

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces upon request:
smooth rubber black
rhombic rubber black or white
smooth polyurethane orange
hot steel sprayed
- other surfaces upon request

- centre cover upon request
- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard, positioning at 45°, chose on order (no add-on price)
- 0° arm design upon request

- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks (ISO II) upon request
- force options see page 219

image shows unit complete with
optional centre cover



DURWEN
Forklift Attachments

More than 75 years experience