
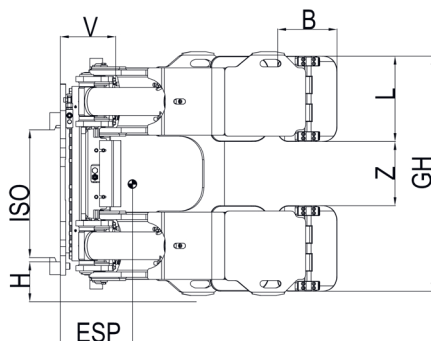


Paper roll clamp 180°

PRK 60-180
ISO IV

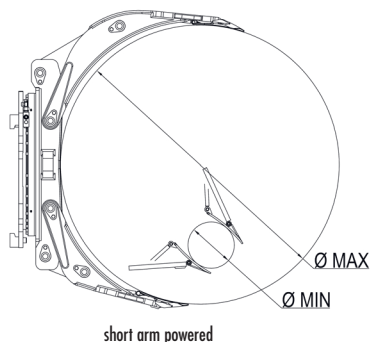

type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
PRK 60 - long arm unsplit											
PRK 60 B-13-180	4500/650	IV	250 - 1300	powered	1240	280x500	200	207	238	295	1200
PRK 60 S-13-180	4500/650		500 - 1300	fixed						295	1195
PRK 60 B-15-180	4200/760		250 - 1520	powered						313	1260
PRK 60 S-15-180	4200/760		450 - 1520	fixed						313	1250
PRK 60 B-16-180	4000/800		250 - 1600	powered						318	1280
PRK 60 S-16-180	4000/800		500 - 1600	fixed						318	1275
PRK 60 - long arm split											
PRK 60 TB-13-180	4500/650	IV	250 - 1300	powered	1240	280x500	200	207	238	289	1190
PRK 60 TS-13-180	4500/650		500 - 1300	fixed						289	1195
PRK 60 TB-15-180	4200/760		250 - 1520	powered						308	1255
PRK 60 TS-15-180	4200/760		450 - 1520	fixed						308	1250
PRK 60 TB-16-180	4000/800		250 - 1600	powered						313	1270
PRK 60 TS-16-180	4000/800		500 - 1600	fixed						313	1265

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces upon request:
smooth rubber black
rhombic rubber black or white
smooth polyurethane orange
hot steel sprayed
- other surfaces upon request
- centre cover upon request

- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard
- 0° arm design upon request
- one piece contact plate per arm upon request

- load extender upon request
- quick release hooks (ISO IV) upon request
- force options see page 219