




Paper roll clamp 360°

**PRK 60
ISO IV**

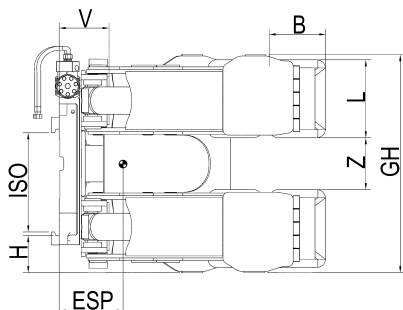

long arm unsplit



long arm split

type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
long arm unsplit											
PRK 60 B - 13	4500/650	IV	250 - 1300	powered	1140	280x400	300	205	228	249	1200
PRK 60 S - 13	4500/650		500 - 1300	fixed						249	1195
PRK 60 B - 14	4300/725		250 - 1450	powered						256	1225
PRK 60 S - 14	4300/725		500 - 1450	fixed						156	1220
PRK 60 B - 15	4200/760		250 - 1520	powered						263	1260
PRK 60 S - 15	4200/760		450 - 1520	fixed						263	1250
PRK 60 B - 16	4000/800		250 - 1600	powered						270	1285
PRK 60 S - 16	4000/800		500 - 1600	fixed						270	1270
PRK 60 B - 18	3800/915		350 - 1830	powered						289	1325
PRK 60 S - 18	3800/915		650 - 1830	fixed						289	1320
PRK 60 B - 19	3200/950		350 - 1900	powered						300	1345
PRK 60 S - 19	3200/950		700 - 1900	fixed						300	1340
PRK 60 B - 20	2800/1000	350 - 2000	powered	314	1380						
PRK 60 S - 20	2800/1000	700 - 2000	fixed	314	1375						
long arm split											
PRK 60 TB - 13	4500/650	IV	250 - 1300	powered	1140	280x400	300	205	228	244	1190
PRK 60 TS - 13	4500/650		500 - 1300	fixed						244	1185
PRK 60 TB - 14	4300/725		250 - 1450	powered						251	1215
PRK 60 TS - 14	4300/725		500 - 1450	fixed						251	1210
PRK 60 TB - 15	4200/760		250 - 1520	powered						258	1255
PRK 60 TS - 15	4200/760		450 - 1520	fixed						258	1250
PRK 60 TB - 16	4000/800		250 - 1600	powered						265	1270
PRK 60 TS - 16	4000/800		500 - 1600	fixed						265	1265
PRK 60 TB - 18	3800/915		350 - 1830	powered						284	1315
PRK 60 TS - 18	3800/915		650 - 1830	fixed						284	1310
PRK 60 TB - 19	3200/950		350 - 1900	powered						295	1335
PRK 60 TS - 19	3200/950		700 - 1900	fixed						295	1330
PRK 60 TB - 20	2800/1000	350 - 2000	powered	311	1370						
PRK 60 TS - 20	2800/1000	700 - 2000	fixed	311	1365						

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces upon request:
smooth rubber black
rhombic rubber black or white
smooth polyurethane orang
hot steel sprayed
- other surfaces upon request

- for centre cover upon request
- 160 bar pressure at entry required, less pressure results in less clamping force
- load extender upon request
- 0° arm design upon request



image shows unit complete with
optional centre cover

- powered short arm sequential movement as standard, positioning at 45°, chose on order (no add-on price)
- one piece contact plate per arm upon request
- quick release hooks (ISO IV) upon request
- force options see page 219

DURWEN
Forklift Attachments

More than 75 years experience