



Paper roll clamp 180°

PRK 80-180
ISO IV

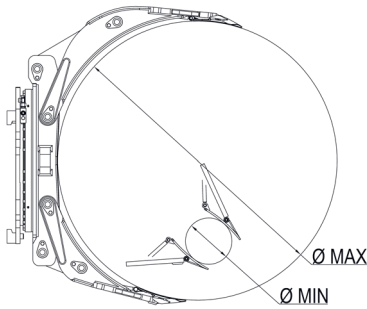

short arm powered

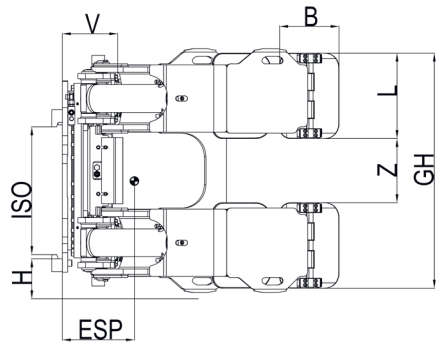

type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LL mm	ESP COG mm	weight kg
PRK 80 - long arm unsplit											
PRK 80 B-13-180	5000/650	IV	250 - 1300	powered	1240	280x500	200	207	238	281	1335
PRK 80 S-13-180	5000/650		500 - 1300	fixed		280x500				281	1330
PRK 80 B-16-180	4500/800		250 - 1600	powered		280x500				317	1408
PRK 80 S-16-180	4500/800		500 - 1600	fixed		280x500				317	1403
PRK 80 B-21-180	3300/1050		450 - 2100	powered		280x500				365	1500
PRK 80 S-21-180	3300/1050		900 - 2100	fixed		280x500				365	1495
PRK 80 - long arm split											
PRK 80 TB-13-180	5000/650	IV	250 - 1300	powered	1240	280x500	200	207	238	276	1325
PRK 80 TS-13-180	5000/650		500 - 1300	fixed		280x500				276	1320
PRK 80 TB-16-180	4500/800		250 - 1600	powered		280x500				312	1398
PRK 80 TS-16-180	4500/800		500 - 1600	fixed		280x500				312	1393
PRK 80 TB-21-180	3300/1050		450 - 2100	powered		280x500				355	1490
PRK 80 TS-21-180	3300/1050		900 - 2100	fixed		280x500				355	1485

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces upon request:
smooth rubber black
rhombic rubber black or white
smooth polyurethane orange
hot steel sprayed
- other surfaces upon request
- centre cover upon request

- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard
- 0° arm design upon request
- one piece contact plate per arm upon request

- load extender upon request
- quick release hooks (ISO IV) upon request
- force options see page 219