


Pulp clamp

PZK
ISO II/III

integral sideshift

The **pulp clamp PZK** is made with double T steel profiles. This type of profile supports excellent visibility through the clamp and allows for a reduced lost load centre. The smooth arms are low marking coated as standard. The clamp suits the needs for proper pulp handling.

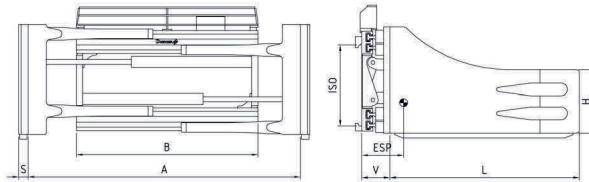

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	height H mm	length L mm	S mm	V mm	ESP mm	weight kg
PZK 20	1650/500	1,5-2,0/500	II	980	530-1710	350	800	30	128	198	435
				980	520-1700		1000			233	470
				1050	570-1770		800			194	445
				1050	560-1760		1000			229	480
PZK 25	2300/500	2,0-2,5/600	II	980	520-1700	350	1000	30	138	233	488
				980	510-1690		1200			283	523
				1050	560-1760		1000			229	500
				1050	550-1750		1200			283	535
				1150	560-1860		1000			222	520
				1150	550-1850		1200			277	555
PZK 30	2700/500	3,0/500	III	980	530-1710	400	1000	30	138	238	575
				980	520-1700		1200	35		308	640
				1050	570-1770		1000	30		234	585
				1050	560-1760		1200	35		304	650
				1150	570-1870		1000	30		227	605
				1150	560-1860		1200	35		297	670
				1350	610-2260		1000	30		210	655
				1350	600-2250		1200	35		280	720
PZK 35	3000/500	3,0/600- 3,5/500	III	1150	560-1860	450	1000	40	141	230	805
				1150	550-1850		1200		151	300	880
				1350	600-2250		1000		141	225	860
				1350	590-2240		1200		151	295	935
PZK 40	3200/600	3,5/600- 4,0/500	III	1150	560-1860	450	1200	40	151	289	890
				1150	550-1850		1400			359	960
				1350	600-2250		1200			284	945
				1350	590-2240		1400			354	1015
PZK 45	3600/600	4,0/600- 5,0/500	III	1350	520-2120	450	1200	40	151	290	950
				1350	500-2100		1600			409	1085
PZK 48	4000/600	5,0/600	III	1350	540-2120	450	1200	40	161	280	980
				1350	520-2100		1600			400	1110

- 2 hydraulic functions required
- includes hoses and couplings
- wear strips welded under arms as standard
- with protection strip as standard

- load backrest type LS-K see page 217
- cylinder protection (ISO II/III) upon request
- wear strips under frame (ISO II/III) upon request
- constant sideshift upon request

PZK 20 up to 1300 mm long arms
PZK 25 up to 1300 mm long arms
PZK 30 up to 1700 mm long arms
PZK 35 up to 1800 mm long arms
PZK 40, 45, 48 up to 1700 mm long arms
longer arms upon request

The capacity of the pulp clamp depends on the required clamp force.

For this reason, the load-bearing capacity of the pulp clamp is related to the clamp force and not to the load centre. The load capacity is identical for the load centres 500 mm and 600 mm.

DURWEN
Forklift Attachments

More than 75 years experience