


Pulp clamp

PZK
ISO IV/Pin

integral sideshift

The pulp clamp PZK is made with double T steel profiles. This type of profile supports excellent visibility through the clamp and allows for a reduced lost load centre. The smooth arms are low marking coated as standard. The clamp suits the needs for proper pulp handling.

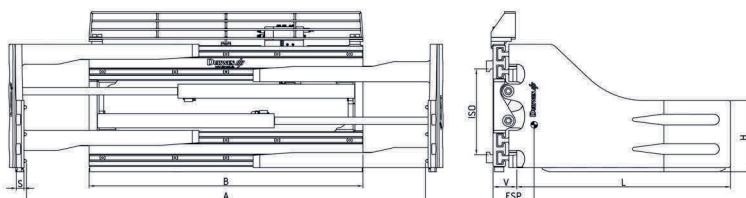



type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A ITI mm	height H mm	length L mm	S mm	V LLC mm	ESP COG mm	weight kg
PZK 50	4200/600	5,0/600	IV	1450	770-2420	460	1200	40	141	275	1140
				1450	760-2410		1400	40	141	335	1210
				1450	750-2400		1600	45	151	395	1280
				1550	540-2210		1400	40	141	320	1240
				1550	530-2200		1600	45	151	390	1310
				1650	580-2390		1400	40	141	315	1270
				1650	570-2380		1600	45	151	385	1340
PZK 60	4000/800	6,0/600	IV	1650	710-2510	460	1400	45	164	295	1430
				1650	700-2500		1600		174	365	1490
				1850	560-2460		1400		164	285	1480
				1850	550-2450		1600		174	355	1540
PZK 80	5000/800	7,0-8,0/600	IV	1650	710-2510	500	1400	50	178	295	1705
				1650	700-2500		1600			365	1790
				1850	560-2460		1400			285	1810
				1850	550-2450		1600			355	1895
				2100	700-3100		1600			345	1970
PZK 100	6500/800	8,0/900- 10,0/600	IV	2000	740-2910	500	1400	60	188	280	2050
				2000	730-2900		1600			350	2150
				2400	640-3110		1400			270	2250
				2400	630-3100		1600			330	2350
PZK 110	8000/800	8,0/1100- 12,0/600	IV	2400	710-3010 700-3000	500	1400 1600	60	249	280 340	2650 2790
PZK 140	10000/800	14,0/600	Pin	3200	870-4100 860-4090	550	1400 1600	70	310	325 380	4450 4570

- 2 hydraulic functions required
- includes hoses and couplings
- wear strips welded under arms as standard
- with protection strip as standard
- load backrest type LS-K see page 217

- cylinder protection (ISO IV) upon request
- wear strips under frame (ISO IV) upon request
- constant sideshift upon request
- arms longer than 1700 mm upon request only

The capacity of the pulp clamp depends on the required clamp force.

For this reason, the load-bearing capacity of the pulp clamp is related to the clamp force and not to the load centre. The load capacity is identical for the load centres 500 mm and 600 mm.



option:
cylinder protection

DURWEN
Forklift Attachments

More than 75 years experience