


Sideshifting fork positioner

PZV-G
ISO IV

integral sideshift, bolt-on forks

The **sideshifting fork positioner PZV-G** uses T profile guides for positioning of forks. Compact design offers reliability and excellent operator visibility. The integral sideshift depends on the actual fork position.

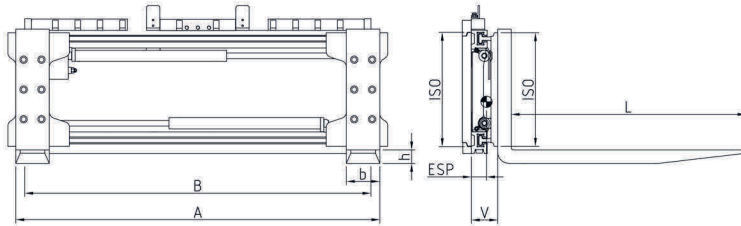

type	capacity kg/mm LC	lift truck capacity to	ISO	A mm	B mm	fork mm	V LLC mm	ESP COG mm	weight kg
PZV 50-G	5000/600	5,0/600	IV	490-1330 490-1530	1250 1450	150x70x1200	138	250 240	578 603
PZV 60-G	6000/600	6,0/600	IV	560-1560 560-1960	1460 1860	150x70x1200	156	215 205	745 815
PZV 80-G	8000/600	7,0-8,0/600	IV	560-1900 560-1960 560-2160 560-2360 560-2500	1800 1860 2060 2260 2400	200x70x1200	156	207 205 203 197 195	950 960 980 1030 1060
PZV 100-G	8000/900	8,0/900	IV	560-2160 560-2360 560-2500	2060 2260 2400	200x80x1200	188	198 195 190	1195 1245 1285
PZV 110-G	8000/1100	8,0/1100	IV	560-2160 560-2360 560-2500	2060 2260 2400	200x80x1200	190	193 190 185	1210 1260 1300

- 2 hydraulic functions required
- includes hoses and couplings
- includes sideshift via valve, depending on opening range
- bolt-on forks as standard
- for hook-on forks ISO 2328
- load backrest/protection strip see page 218
- for forks up to 2400 mm, longer please ask
- clamping of goods not allowed