


Fork positioner

PZV-IG
ISO II

integrated, integral sideshift, bolt-on forks

The fork positioner PZV-IG uses T-profiles to adjust the forks. The compact design offers reliability and excellent visibility for the driver. An integral sideshift depends on the actual fork position. Also prepared for the use of standard forks according to ISO 2328. Bolt-on forks are included.

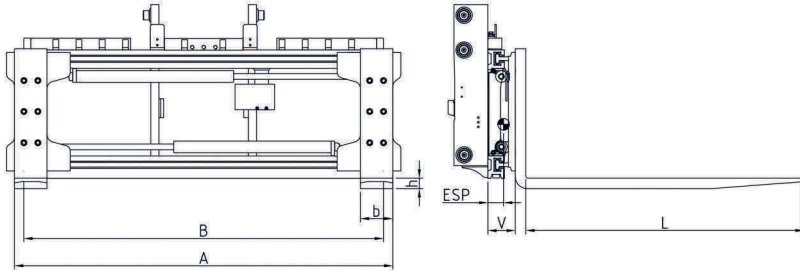

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	forks b x h x L mm	V LLC mm	ESP COG mm	weight kg
PZV 16-IG*	1600/500	1,0-1,5/500	II	850	470-910	100x40x1200	114	208	300
				980	470-1040			203	308
				1040	470-1100			201	311
PZV 20-IG*	2000/500	1,8-2,0/500	II	850	470-910	100x45x1200	114	213	309
				980	470-1040			210	317
				1040	470-1100			208	320
				1150	470-1210			206	325
PZV 25-IG*	2500/500	2,0/600- 2,5/500	II	980	490-1060	120x40x1200	114	215	322
				1040	490-1120			213	325
				1100	490-1180			211	327
				1150	490-1230			210	330
PZV 28-IG*	2500/600	2,5/600	II	1040	495-1125	125x45x1200	114	220	340
				1100	495-1185			218	343
				1150	495-1235			215	345

- 2 hydraulic functions required
- without hoses and couplings
- includes integral sideshift, depending on opening range
- bolt-on forks as standard
- for hook-on forks ISO 2328
- including brackets, chain anchor and stub shafts, without rollers
- detailed information including carriage drawings are required with the order as well as fork lift model and mast model details
- weight, COG and LLC do not include brackets
- LLC does not include forks
- load backrest/protection strip see page 218
- for forks up to 2400 mm, longer please ask
- clamping of goods is not allowed

***Forks longer 1600 mm
cross section changes**

type	forks b x h mm
PZV 16-IG	120x40
PZV 20-IG	120x40
PZV 25-IG	120x50
PZV 28-IG	125x50