


Sideshifting fork positioner

PZV-IG
ISO III

integrated, integral sideshift, bolt-on forks

The fork positioner PZV-IG uses T-profiles to adjust the forks. The compact design offers reliability and excellent visibility for the driver. An integral sideshift depends on the actual fork position. Also prepared for the use of standard forks according to ISO 2328. Bolt-on forks are included.

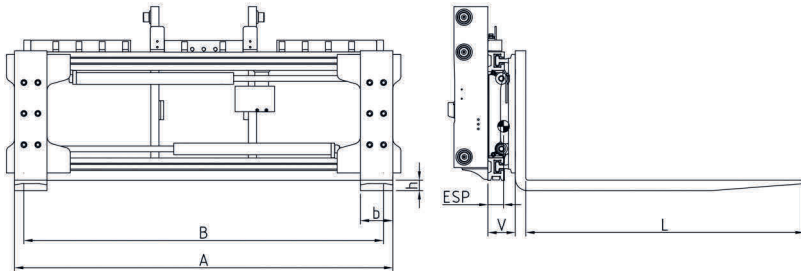

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	forks b x h x L mm	V LLC mm	ESP COG mm	weight kg
PZV 30-IG*	3000/500	3,0/500	III	1040	490-1120	125x45x1200	119	210	355
				1150	490-1230			208	363
				1200	490-1280			206	367
				1250	490-1330			203	370
				1350	490-1430			200	379
PZV 35-IG	3500/500	3,0/600- 3,5/500	III	1040	490-1120	140x50x1200	119	220	395
				1150	490-1230			215	402
				1200	490-1280			212	407
				1250	490-1330			208	412
				1350	490-1430			205	422
PZV 45-IG	5000/500	3,5/600- 5,0/500	III	1150	490-1230	150x60x1200	129	233	450
				1250	490-1330			227	461
				1300	490-1380			226	464
				1310	490-1390			225	467
				1350	490-1430			223	471
				1450	490-1530			220	481
PZV 48-IG	5000/600	5,0/600	III	1310	490-1390	150x60x1200	129	210	495
				1350	490-1430			205	500

- 2 hydraulic functions required
- without hoses and couplings
- includes integral sideshift, depending on opening range
- bolt-on forks as standard
- for hook-on forks ISO 2328
- including brackets, chain anchor and stub shafts, without rollers
- detailed information including carriage drawings are required with the order as well as fork lift model and mast model details
- weight, COG and LLC do not include brackets
- LLC does not include forks
- load backrest/protection strip see page 218
- for forks up to 2400 mm, longer please ask
- clamping of goods is not allowed

*Forks longer 1600 mm cross section changes	
type	forks b x h mm
PZV 30-IG	125x50

DURWEN
Forklift Attachments

More than 75 years experience