


Fork positioner

PZV-SI
ISO IV

integrated, constant sideshift, no forks

The fork positioner PZV-SI uses T-profiles to adjust the forks. The compact design offers reliability and excellent visibility for the driver. A constant sideshift allows the entire sideshift to be used in any fork position. The standard fork according to ISO 2328 is used. Low weight and a small lost load center support good residual capacity values.

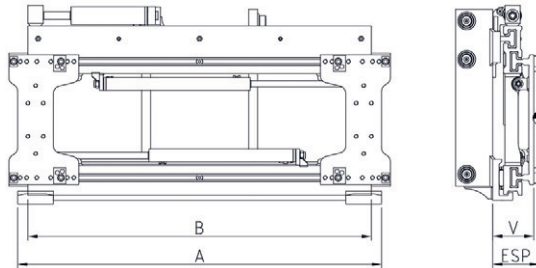


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	to suit fork width mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
PZV 50-SI	5000/600	5,0/600	IV	1250 1450	490-1330 490-1530	130-150	+/-100	177	60 53	380 405
PZV 60-SI	6000/600	6,0/600		1460 1860	560-1560 560-1960	130-200	+/-100 +/-160	190	65 60	580 650
PZV 70-SI	7000/600	6,5-7,0/600		1860 2060	560-1960 560-2160	150-200	+/-160	190	70 68	655 695
PZV 80-SI	8000/600	8,0/600		1800 1860 2060 2260 2400	560-1900 560-1960 560-2160 560-2360 560-2500	150-200	+/-160	190	75 73 68 63 60	645 660 700 750 790
				2060 2260 2400	560-2160 560-2360 560-2500				73 70 65	1160 1210 1250
				2060 2260 2400	560-2160 560-2360 560-2500				70 67 63	1175 1225 1265
				2060 2260 2400	560-2160 560-2360 560-2500				70 67 63	1175 1225 1265
PZV 100-SI	8000/900	8,0/900		2060 2260 2400	560-2160 560-2360 560-2500	150-200	+/-160	226	73 70 65	1160 1210 1250
PZV 110-SI	8000/1100	8,0/1100		2060 2260 2400	560-2160 560-2360 560-2500	150-200	+/-160	231	70 67 63	1175 1225 1265

- 2 hydraulic functions required
- without hoses and couplings
- constant sideshift as standard
- for hook-on forks ISO 2328
- bolt-on forks can be used

- forks not included
- including brackets, chain anchor and stub shafts, without rollers
- detailed information including carriage drawings are required with the order as well as fork lift model and mast model details
- weight, COG and LLC do not include brackets
- LLC does not include forks

- load backrest/protection strip see page 218
- for forks up to 2400 mm, longer please ask
- PZV 20-50 allow min. fork position 80 mm inside, PZV 60-110 allow min. fork position 160 mm inside
- clamping of goods is not allowed

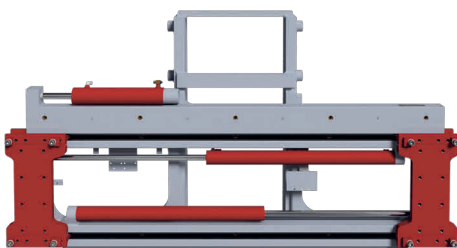

DURWEN 
Forklift Attachments

More than 75 years experience