


Fork positioner

RZV-IG
ISO III

integrated, integral sideshift, bolt-on forks

The fork positioner RZV-IG with bolt-on forks has a stable round bar guides in which the two mounting plates with forks are moved. Sideshift by valve allows sideshift depending on the opening range of the fork mounts. Standard ISO 2328 forks can also be used and the fork length can be up to 2400 mm. Very good visibility is to be emphasized which makes safe working possible. Euro pallets can be picked up lengthwise. In addition, this device is characterised by its compact design whereby the forklift retains the greatest possible residual load capacity.

Delivery incl. brackets, stubshafts and chain anchors.

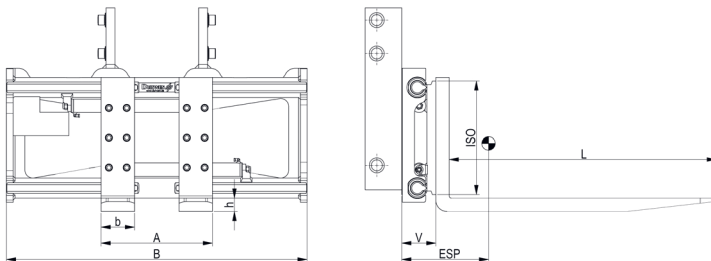



type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	forks b x h x L mm	V LLC mm	ESP COG mm	weight kg
RZV 30 -IG*	3000/500	3,0/500	III	1040	495-1125	125x45x1200	138	273	300
				1150	495-1235			270	310
				1350	495-1435			265	325
RZV 35-IG	3500/500	3,0/600- 3,5/500		1150	490-1230	140x50x1200	138	295	350
				1350	490-1430			285	365
				1150	490-1230			270	410
RZV 40-IG	4000/500	3,5/600- 4,0/500		1350	490-1430	140x50x1200	153	260	430
				1550	490-1630			250	450
				1750	490-1830			240	470
RZV 45-IG	5000/500	4,0/600- 5,0/500		1150	500-1240	150x60x1200	153	300	455
				1350	500-1440			290	478
				1550	500-1640			280	495
				1750	500-1840			270	515
RZV 48-IG	5000/600	5,0/600		1150	500-1240	150x60x1200	153	300	460
				1350	500-1440			290	490
				1550	500-1640			280	505
				1750	500-1840			270	520

- 2 hydraulic functions required
- without hoses and couplings
- features bolt-on forks as standard
- sideshift via valve, depending on opening range
- for hook-on forks ISO 2328
- including brackets, chain anchor and stub shafts, without rollers

- detailed information including carriage drawings are required with the order as well as fork lift model and mast model details
- weight, COG and LLC do not include brackets
- LLC does not include forks
- load backrest/protection strip see page 218
- for forks up to 2400 mm, longer please ask
- clamping of goods is not allowed

***Forks longer 1600 mm
cross section changes**

type	forks b x h mm
RZV 30-IG	125x50

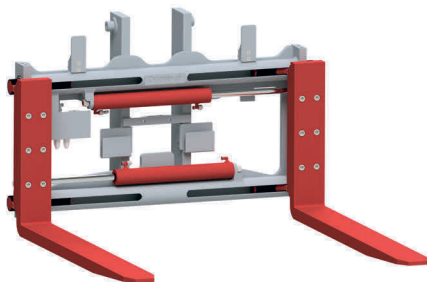

option: protection strip

DURWEN 
Forklift Attachments

More than 75 years experience