
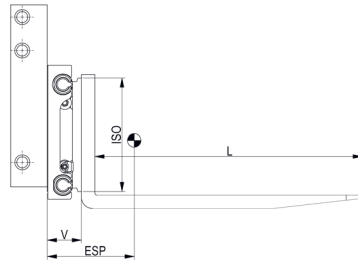


Fork positioner

**RZV-IG
ISO IV**

integrated, integral sideshift, bolt-on forks



The fork positioner RZV-IG with bolt-on forks has a stable round bar guides in which the two mounting plates with forks are moved. Sideshift by valve allows sideshift depending on the opening range of the fork mounts. Standard ISO 2328 forks can also be used and the fork length can be up to 2400 mm. Very good visibility is to be emphasized which makes safe working possible. Euro pallets can be picked up lengthwise. In addition, this device is characterised by its compact design whereby the forklift retains the greatest possible residual load capacity. Delivery incl. brackets, stubshafts and chain anchors.



type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	forks b x h x L mm	V LLC mm	ESP COG mm	weight kg
RZV 50-IG	5000/600	5,0/600	IV	1350	500-1440	150x70x1200	163	295	600
				1450	500-1540			290	615
				1550	500-1640			285	630
RZV 60-IG	6000/600	6,0/600		1460	560-1560	150x70x1200	165	240	710
				1860	560-1960			225	770
RZV 70-IG	7000/600	6,5-7,0/600		1460	560-1560	150x70x1200	165	235	720
				1860	560-1960			220	780
				2060	560-2160			215	820
RZV 80-IG	8000/600	8,0/600		1800	560-1900	200x70x1200	165	245	885
				1860	560-1960			240	895
				2060	560-2160			235	930
				2260	560-2360			225	965
				2400	560-2500			220	995
RZV 100-IG	8000/900	8,0/900		2060	560-2160	200x80x1200	190	240	1135
				2260	560-2360			235	1185
				2400	560-2500			230	1230
RZV 110-IG	8000/1100	8,0/1100		2060	560-2160	200x80x1200	192	243	1150
				2260	560-2360			238	1200
				2400	560-2500			233	1245

- 2 hydraulic functions required
- without hoses and couplings
- features bolt-on forks as standard
- sideshift via valve, depending on opening range
- for hook-on forks ISO 2328
- including brackets, chain anchor and stub shafts, without rollers

- detailed information including carriage drawings are required with the order as well as fork lift model and mast model details
- weight, COG and LLC do not include brackets
- LLC does not include forks
- load backrest/protection strip see page 218
- for forks up to 2400 mm, longer please ask
- clamping of goods is not allowed

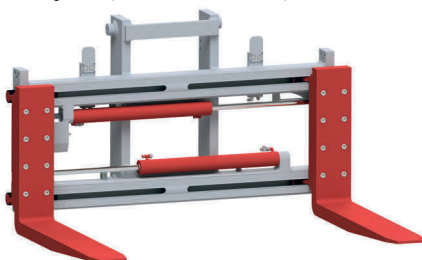

option: protection strip

DURWEN 
Forklift Attachments

More than 75 years experience