


Building material clamp

UVP-S

constant sideshift, bolt-on forks

The **building material clamp UVP** is an ideal attachment for the transport of a variety of building materials. With the articulating slip-on arms, various loads can be picked up quickly and safely without pallets. Also pallet loads can easily be transported with the slip-on arms removed. A robust backrest protects the driver from loose stones falling through the mast.

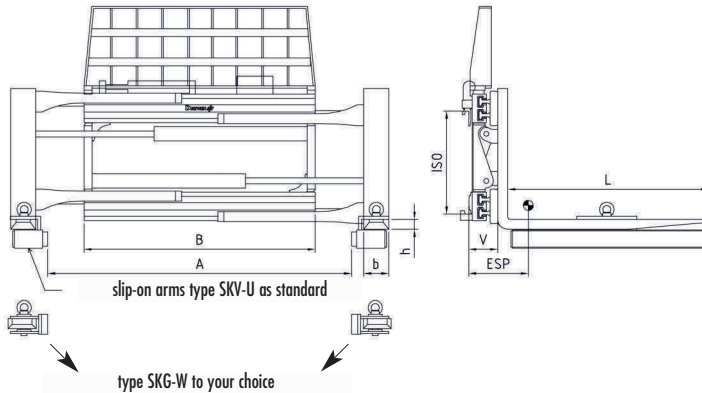

type	capacity on forks kg LC mm	capacity as clamp kg LC mm	lift truck to LC mm	ISO	B mm	opening range A ITI mm	forks b x h x L mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
UVP 25-S	2500/600	1900/500	2,0-2,5/600	II	1150	170-1490	140x50x1200	+/- 100	148	337	635
UVP 30-S	3000/500	2400/500	3,0/500	III	1200	170-1540	140x50x1200		153	322	680
UVP 35-S	3500/500	2700/500	3,0/600-3,5/500	III	1200	140-1500	150x50x1200		155	298	775
UVP 40-S	4000/500	2900/500	3,5/600-5,0/500	III	1350	140-1650	150x50x1200		165	288	840
UVP 45-S	4500/600	3100/500	5,0/600	III	1350	140-1650	150x60x1200		175	302	890

- 2 hydraulic functions required
- includes hoses and couplings
- features bolt-on forks as standard
- toe-in on forks as standard
- constant sideshift as standard
- sideshift rollers as standard
- with pressure relief valve on the clamp function as standard
- with slip-on arms type SKV-U as standard, or choose type SKG-W at no extra charge
- more slip-on arms see page 215
- solid load backrest as standard, height (ISO type A):
UVP 25-S-UVP 30-S = 1350 mm from floor
UVP 35-S-UVP 45-S = 1450 mm from floor



bolt-on forks

DURWEN 
Forklift Attachments

More than 75 years experience