


Sideshifting fork positioner

ZVP-S
ISO IV

constant sideshift, bolt-on forks


The sideshifting fork positioner ZVP-S is designed to allow fork spread beyond the width of the carriage. This flexible feature is ideal in situations where space is important. A huge variety of loads can be handled with extreme efficiency. This strong and durable attachment has excellent visibility and minimised lost load centre with the use of innovative double T / E profiles. The attachment is equipped with constant sideshift and bolt-on forks as standard. Clamping of goods is not allowed with this attachment.

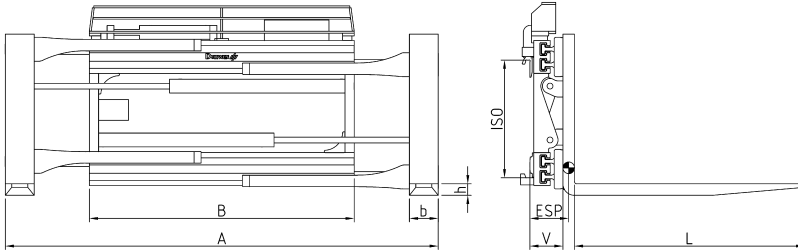

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A OTO mm	forks b x h x L mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
ZVP 50-S	5000/600	5,0/600	IV	1350	550-2060	150x60x1200	+/- 100	179	200	870
				1450	550-2160		+/- 100		198	880
				1550	550-2260		+/- 160		196	890
				1800	550-2510		+/- 160		190	945
ZVP 60-S	6000/600	6,0/600		1450	550-2160	150x65x1200	+/- 100	179	225	890
				1550	550-2260		+/- 160		210	910
				1750	550-2460		+/- 160		205	960
				1800	550-2510		+/- 160		203	970
				2000	550-2710		+/- 160		200	1030
ZVP 80-S	8000/600	7,0-8,0/600		1750	560-2460	200x70x1200	+/- 160	198	220	1430
				1800	560-2510				217	1450
				1850	560-2560				215	1470
				1950	560-2660				210	1510
				2000	560-2710				208	1520
				2200	560-2910				195	1590
ZVP 100-S	8000/900	8,0/900		1950	560-2600	200x80x1200	+/- 160	207	215	1660
				2000	560-2650				213	1680
				2100	560-2750				210	1720
				2200	560-2850				205	1760
				2400	560-3050				195	1840
ZVP 110-S	8000/1100	8,0/1100		2200	560-2750	200x80x1200	+/- 160	216	220	2090
				2400	560-2950				215	2220

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard

- sideshift bottom rollers as standard
- with protection strip as standard
- load backrest type LS-K see page 217

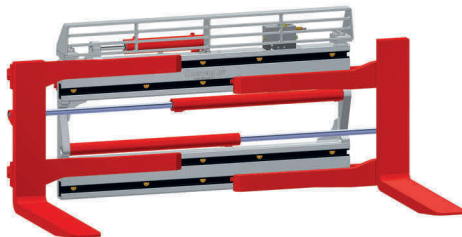

forks bolted from the rear

DURWEN
Forklift Attachments

More than 75 years experience