


Fork positioner

ZVW-GS
ISO III

constant sideshift, bolt-on forks

The high-performance fork positioner ZVW-GS offers outstanding durability and excellent visibility.

The double chrome axis guideways is particularly clean and enables precise fork positioning due to high-quality hydraulics. The bolt-on forks are firmly attached to the carriers and provide smooth running and precision even in quick operation. The constant sideshift operates at every fork position. This means that a separate cylinder moves the complete frame.

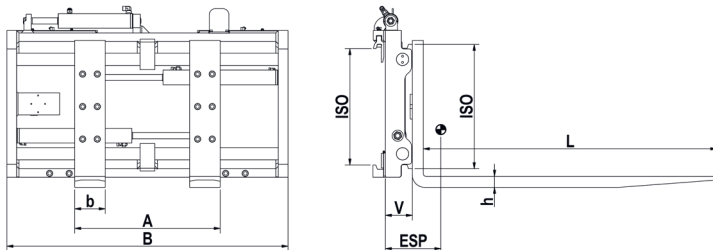


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm OTO	forks b x h x L mm	sideshift mm	V LLC mm	ESP COG mm	weight kg	
ZVW 30-GS*	3000/500	3,0/500	III	1040 1150 1350	325-945 325-1055 325-1255	125x45x1200	+/- 100	127	248 241 228	352 363 388	
ZVW 35-GS	3500/500	3,0/600-3,5/500		1150 1350	340-1070 340-1270	140x50x1200			127	265 252	398 424
ZVW 40-GS	4000/500	3,5/600-4,0/500		1150 1350 1550 1750	370-1050 370-1250 370-1450 370-1650	140x50x1200				150	249 247 243 239
ZVW 45-GS	5000/600	4,0/600-5,0/600		1150 1350 1550 1750	380-1060 380-1260 380-1460 380-1660	150x60x1200		150			274 261 249 240

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard
- features bolt-on forks as standard

- also for hook-on forks ISO 2328
- load backrest/protection strip see page 218
- clamping of goods is not allowed

***Forks longer 1600 mm
cross section changes**

type	forks b x h mm
ZVW 30-GS	125x50

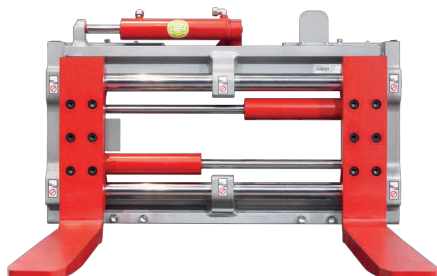

option: protection strip

DURWEN
Forklift Attachments

More than 75 years experience