
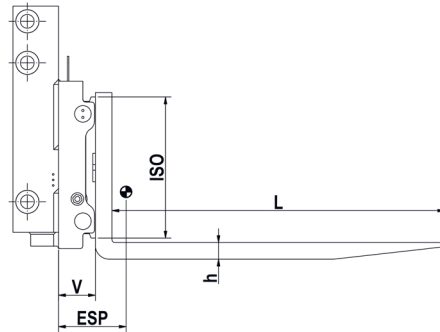


Fork positioner

**ZVW-IG
ISO IV**

integrated version, integral sideshift (via valve), bolt-on forks


The **integral fork positioner ZVW-IG** uses a robust chromed bar system in a stable frame. The unit is equipped with bolt-on forks. Depending on the capacity, hook-on forks can be used for replacement. Integral sideshift (via valve) is standard and depends on the opening range.

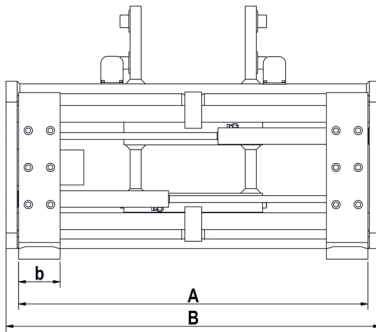

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm OTO	forks b x h x L mm	V LLC mm	ESP COG mm	weight kg
ZVW 50-IG	5000/600	5,0/600	IV	1350 1450 1550	380-1260 380-1360 380-1460	150x70x1200	133	225 220 215	645 665 680
ZVW 60-IG	6000/600	6,0/600		1460 1660 1860	380-1340 380-1540 380-1740	150x70x1200	150	225 215 205	735 775 815
ZVW 70-IG	7000/600	6,5-7,0/600		1460 1860 2060	380-1340 380-1740 380-1940	150x70x1200	177	220 205 200	845 945 990
ZVW 80-IG	8000/600	8,0/600		1800 1860 2060 2260 2400	480-1680 480-1740 480-1940 480-2140 480-2280	200x70x1200	177	250 245 235 230 225	1070 1085 1140 1190 1225
ZVW 100-IG	8000/900	8,0/900		2060 2260 2400	480-1940 480-2140 480-2280	200x80x1200	195	235 225 220	1410 1480 1530
ZVW 110-IG	8000/1100	8,0/1100		2060 2260 2400	480-1940 480-2140 480-2280	200x80x1200	210	230 225 220	1505 1575 1625

- 2 hydraulic functions required
- ready to connect, access metric
- features bolt-on forks as standard
- for hook-on forks ISO 2328

- including brackets, chain anchor and stub shafts, without rollers
- detailed information including carriage drawings are required with the order as well as fork lift model and mast model details
- weight, COG and LLC do not include brackets
- LLC does not include forks
- load backrest/protection strip see page 218
- clamping of goods is not allowed

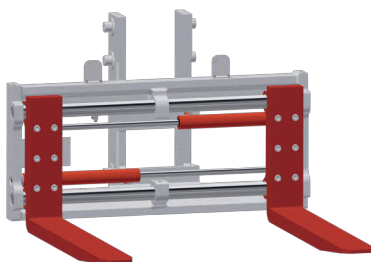

DURWEN
Forklift Attachments

More than 75 years experience