


Hydraulic telescopic forks TGZ




standard:
comfortable
hoist point
and handle

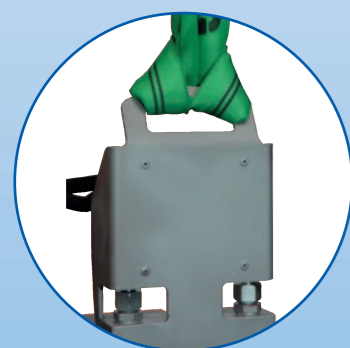

easy access to
hydraulic connections!


Available with
FEM / ISO
mounting!

twin cylinders for powerfull
movement




highly wear resistant
synthetic wear stripes

Standard!: wear resistant steel + 2 mm
at full bottom length!
optional available!
again + 6 mm extra wear resistant steel

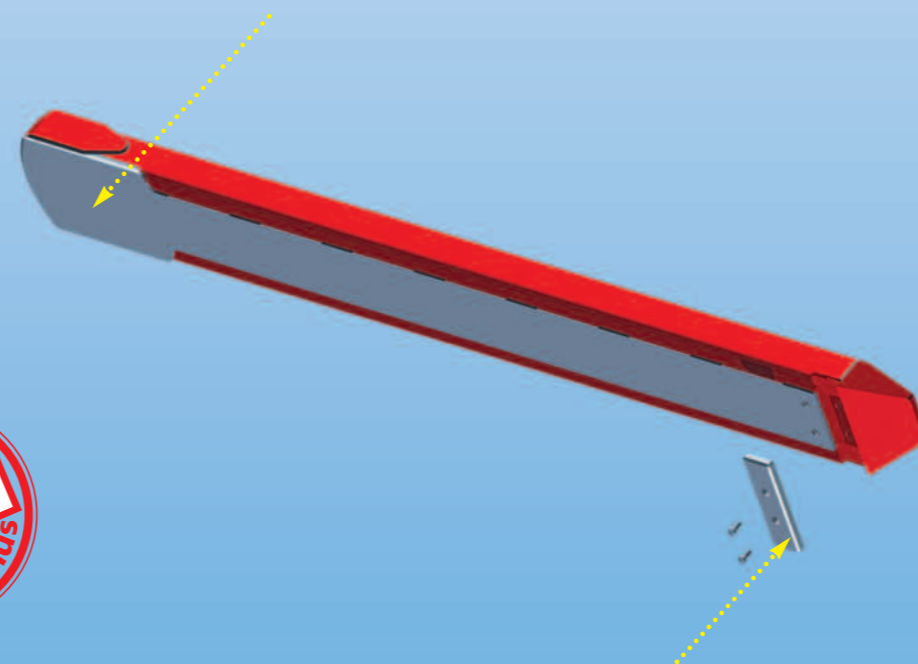

Exchangeable wear strip under
fork tip standard!
Optional: + 6 mm extra thickness!




solid one piece fork tip
for less damage!

Save even more time and money! Have sideshift and fork positioning combined
with telescopic forks.

Fork positioner model RZV combined with telescopic forks

Moves the Teleforks across full frame width and offers sideshift as well. 3 hydraulic functions needed, can be
combined with a solenoid valve.

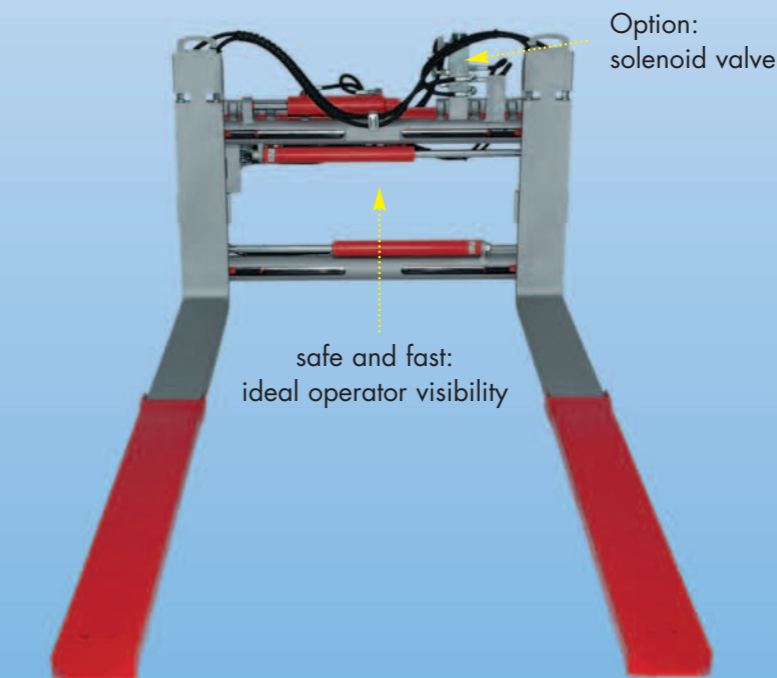


Option:
solenoid valve

safe and fast:
ideal operator visibility




Fork positioner model ZVP combined with telescopic forks

Moves the Teleforks beyond the frame width and offers sideshift as well. 3 hydraulic functions needed, can be
combined with a solenoid valve.

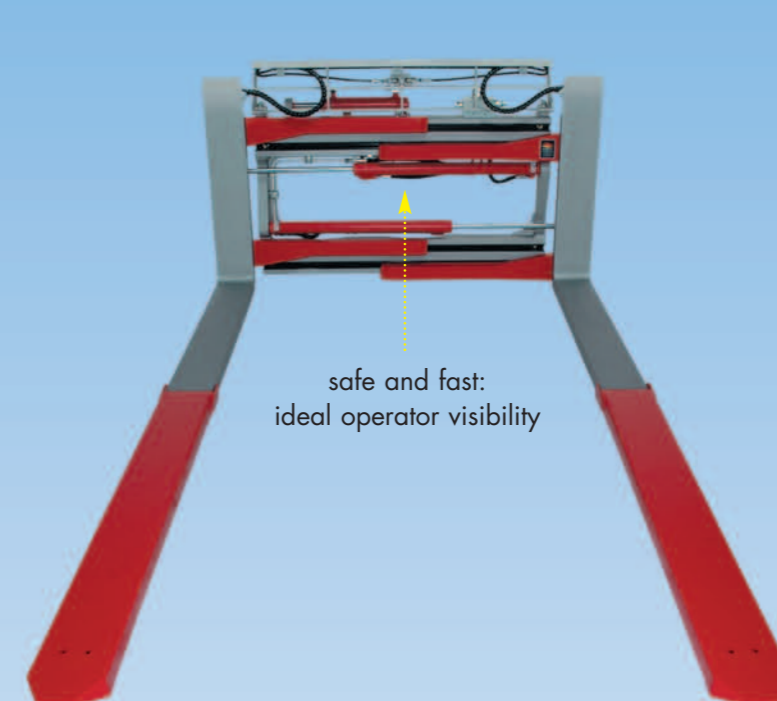

safe and fast:
ideal operator visibility

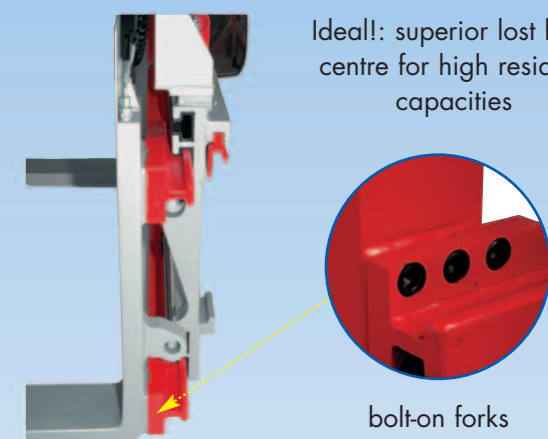

Ideal!: superior lost load
centre for high residual
capacities

bolt-on forks



Video TGZ-ZVP