
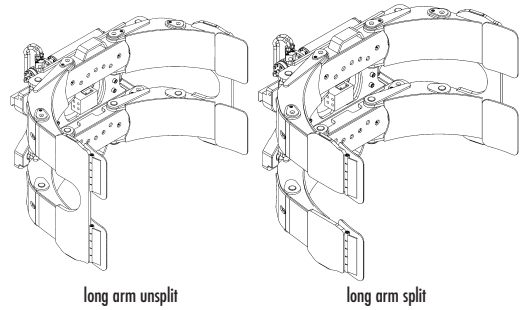


Paper roll clamp 360°

PRK 25
ISO II/III

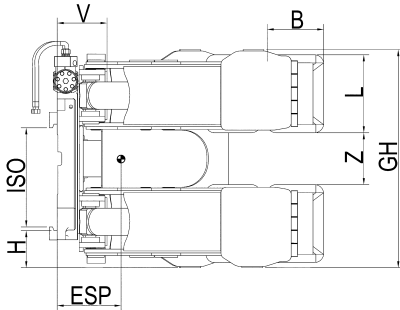


type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
long arm unsplit											
PRK 25 B - 11	2000/575	II/III	250 - 1150	powered	840	220x300	200	143	184	200	565
PRK 25 S - 11	2000/575		400 - 1150	fixed						200	515
PRK 25 B - 13	1800/650		250 - 1300	powered						215	580
PRK 25 S - 13	1800/650		400 - 1300	fixed						215	530
PRK 25 B - 14	1700/700		250 - 1400	powered						225	590
PRK 25 S - 14	1700/700		600 - 1400	fixed						225	540
PRK 25 B - 15	1600/760		250 - 1520	powered						235	615
PRK 25 S - 15	1600/760		600 - 1520	fixed						235	580
PRK 25 B - 16	1500/800		250 - 1600	powered						248	653
PRK 25 S - 16	1500/800	600 - 1600	fixed	248	600						
long arm split											
PRK 25 TB - 11	2000/575	II/III	250 - 1150	powered	840	220x300	200	143	184	195	560
PRK 25 TS - 11	2000/575		400 - 1150	fixed						195	510
PRK 25 TB - 13	1800/650		250 - 1300	powered						210	575
PRK 25 TS - 13	1800/650		400 - 1300	fixed						210	525
PRK 25 TB - 14	1700/700		250 - 1400	powered						220	585
PRK 25 TS - 14	1700/700		600 - 1400	fixed						220	535
PRK 25 TB - 15	1600/760		250 - 1520	powered						260	610
PRK 25 TS - 15	1600/760		600 - 1520	fixed						240	572
PRK 25 TB - 16	1500/800		250 - 1600	powered						273	648
PRK 25 TS - 16	1500/800		600 - 1600	fixed						245	595

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces upon request:
smooth rubber black
rhombic rubber black or white
smooth polyurethane orange
hot steel sprayed
- other surfaces upon request

- centre cover upon request
- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard, positioning at 45°, chose on order (no add-on price)
- 0° arm design upon request

- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks (ISO II) upon request
- force options see page 219

image shows unit complete with
optional centre cover



DURWEN
Forklift Attachments

More than 75 years experience